

FEATURES:

- RoHS 6/6 Compliant
- Low Insertion Loss
- High Channel Isolation
- Flat and Wide Passband
- Low Polarization Dependent Loss
- Epoxy-Free Optical Path
- Exceptionally Stable and Reliable
- Telcordia GR-1221 Compliant
- Thin-Film-Filter based



APPLICATIONS:


- Dense WDM Systems
- Long Haul Networks
- Metro Networks
- Access/ Enterprise Networks
- CATV Fiber Optic Links

DESCRIPTION:

Based on Go!Foton's patented technology, SELMUX™ series is introduced to cover all TFF-based components using an all-glass platform for improved performance, such as lower insertion loss and higher thermal stability, with a competitive cost structure. Because of its high thermal stability, SELMUX series can offer compliance to Outside Plant (OSP) requirement upon request.

Go!Foton's DWDMs, are based on Go!Foton's patent pending technology. This technology puts Go!Foton as one of only a few companies with a unique process for tuning the center wavelength in the DWDM spectrum. Based on NSG's unique SELFOC technology, the process eliminates the severe manufacturing burdens placed on the thin film filter, thus simplifying center wavelength tolerances and reducing cost. Go!Foton's SELMUX products are epoxy-free in the optical path and are in compliance with RoHS 6/6.

Wavelength Spectrum:

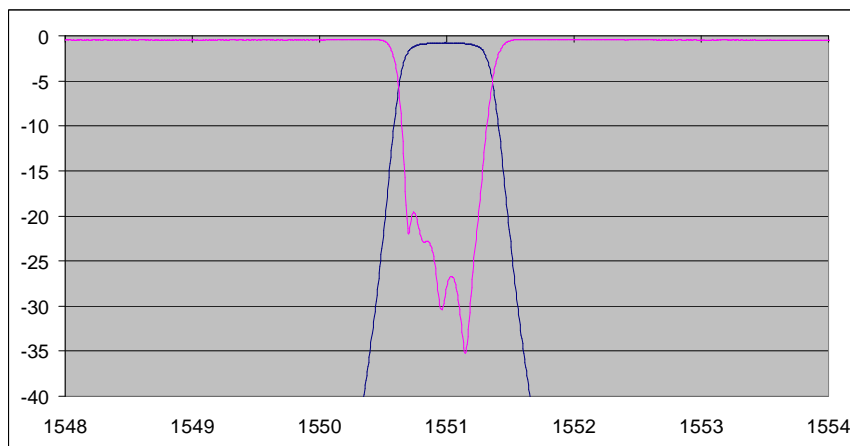

SPECIFICATIONS:

The products supplied to this specification shall meet or exceed all the requirements specified herein.

A. OPTICAL CHARACTERISTICS


Parameter	Unit	1ch OADM	2ch OADM	3ch OADM	4ch OADM
Port Configuration	-	2x2	3x3	4x4	5x5
Operating Wavelength	nm	ITU			
Channel Spacing	GHz	100			
Center Wavelength	nm	ITU			
Passband Bandwidth	nm	$\Delta c \pm 0.11$			
Insertion Loss	dB	≤0.9	≤1.5	≤1.9	≤2.3
Express Channel Insertion Loss	dB	≤0.9	≤1.8	≤2.4	≤3.2
Add-Drop Channel Ripple	dB	≤ 0.50			
Drop Channel Isolation					
Adjacent Channel Isolation	dB	≥30			
Non-Adjacent Channel Isolation	dB	≥ 45			
Add Channel Isolation					
Adjacent Channel Isolation	dB	≥15			
Non-Adjacent Channel Isolation	dB	≥15			
Express Channel Isolation	dB	≥24			
Polarization Dependent Loss	dB	≤ 0.20			
Optical Return Loss	dB	≥50			
Directivity	dB	≥50			
Optical Power Handling	mW	≤ 500			
Operating Temperature Range	°C	-40~85			
Storage Temperature Range	°C	-40~85			
Fiber Type	-	ITU G657A2, G657 B2 and G65D Compliant Single Mode Fiber			
Fiber Jacket	-	900um tight buffer			
Fiber Length for Cassette	mm	1000 ± 100			
Port Identification	-	Cable Marker			
Package Size	mm	1ch: 60x35x6			
		2ch, 3ch OADM: 70x45x8			
		4ch OADM: 95x75x8			

Notes:


1. All specifications include connector losses.
2. Other customized channels are also available per customer's request
3. Other package size available upon request.

B. Schematic Diagrams:


1-Channel OADM

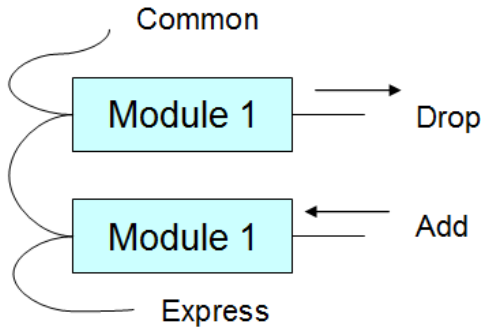


2-Channel OADM

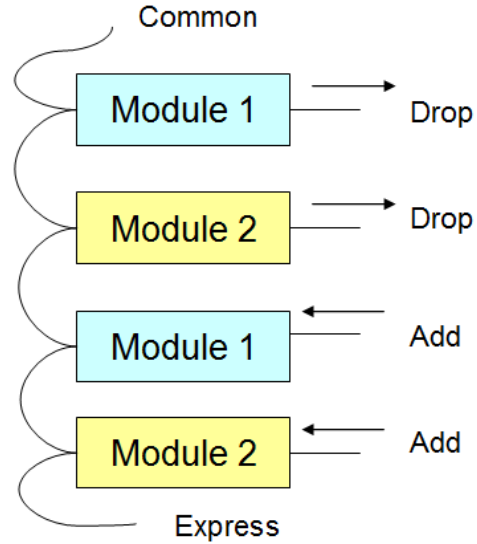


3-Channel OADM

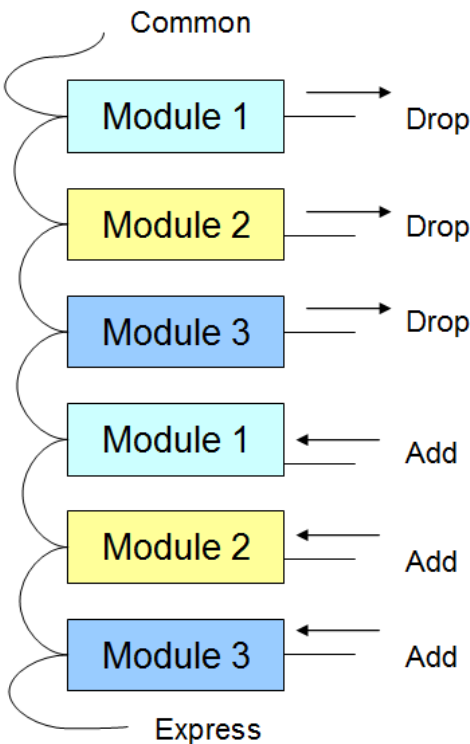

4-Channel OADM

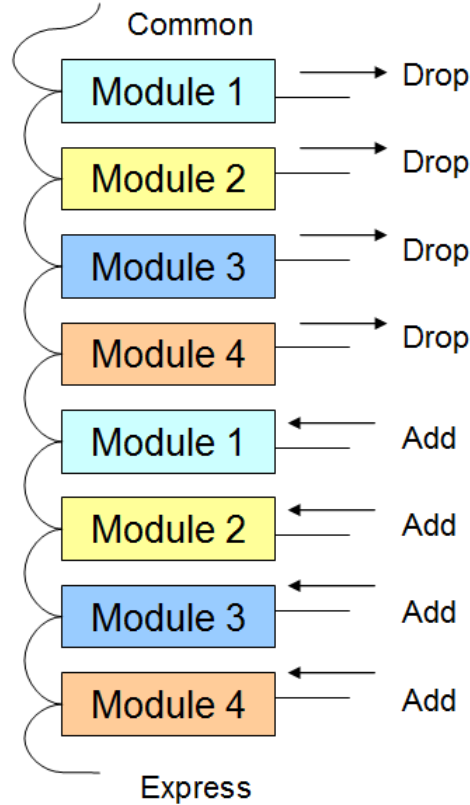

Ordering Information:

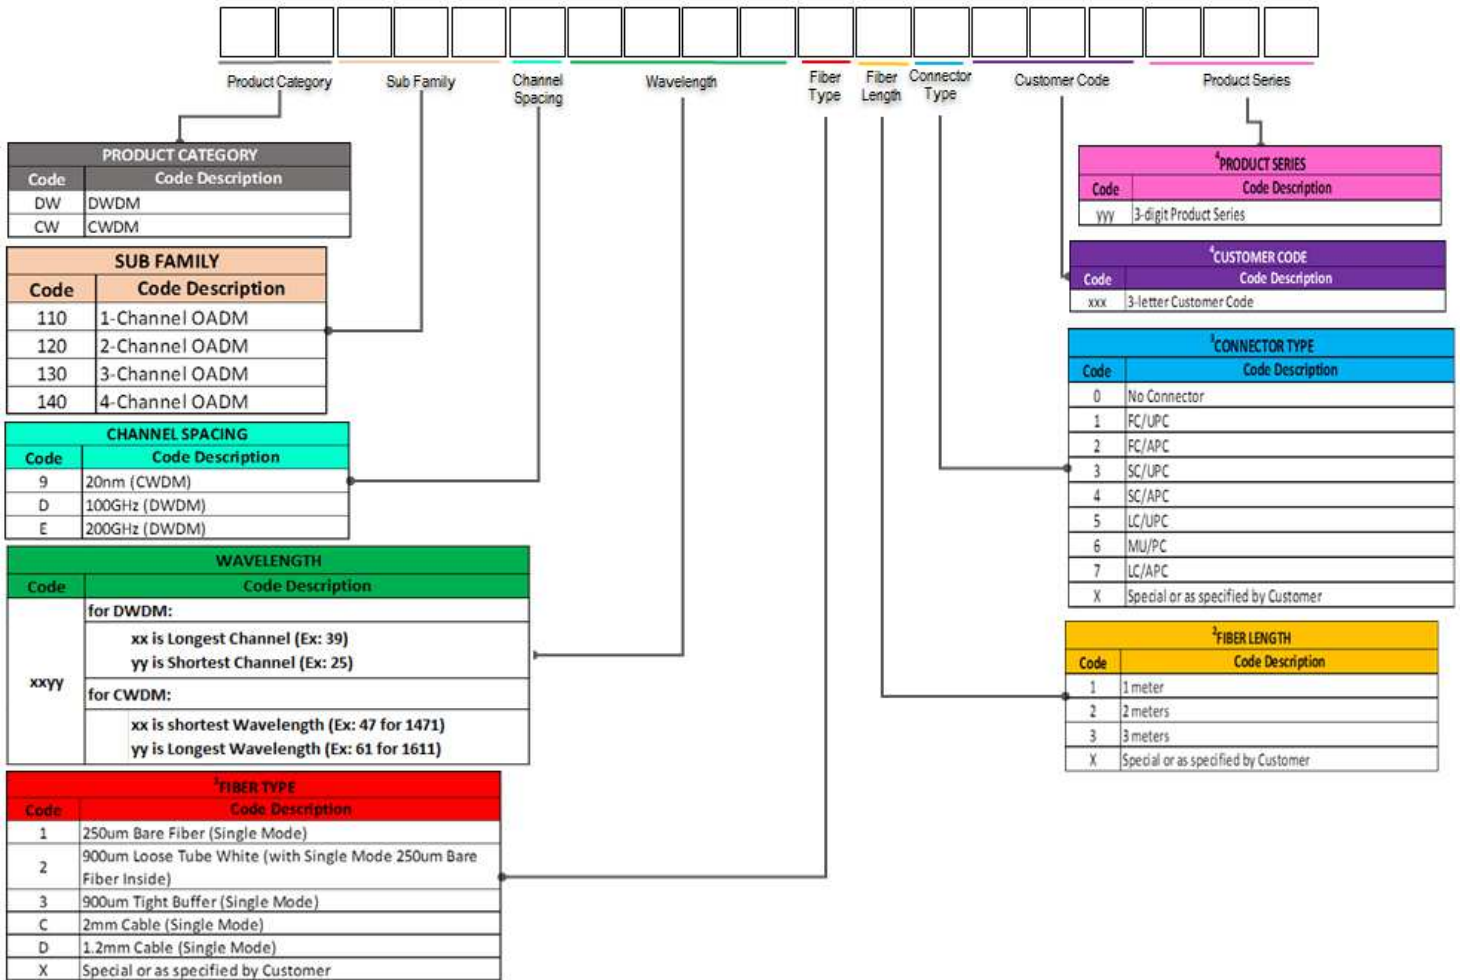

Notes:

- ¹ Standard Fiber Type is ITU-T G657.A2/B2 and G652.D.
- ² Standard Package Size is 60x35x6mm for 1-channel OADM and 70x45x8mm for 2-channel OADM
- ³ Fiber Length tolerance is +/-0.1 meter.
- ³ All ports are with connector of the same type.
- ⁴ Only applicable for products which are not covered by the Standard Specification.

Example: DW110DC41315

1-Channel DWDM OADM, 100GHz spacing, C41, one (1) meter 900um tight buffer with LC/UPC connectors

Go!Foton Inc. (Japan)
5-4 Tokodai, Tsukuba City
Ibaraki Pref. Japan, 300-2635
Tel: +81 029 847 8686
Fax: +81 029 847 8693
www.gofoton.co.jp

Go!Foton Europe Sales
Hoogerheide
The Netherlands
CustomerCare@gofoton.com
Tel: +31 164 62 04 22
Fax: +31 164 62 04 17
www.gofoton.eu

GF Micro Optics Philippines, Inc.
LTI Standard Factory Building
134 East Main Avenue, SEPZ
Laguna Technopark,
Biñan, Laguna 4024 Philippines
Tel: +63 2 751 0304
Fax: +63 2 751 0305
www.gofoton.ph

Go!Foton Nanjing Company Ltd.
Nanjing Jiangning National
High Tech Industrial Park
Nanjing Jiangning Science Park
2 Qiande Road, Building 7, 1st Floor
Jiangning, Nanjing
Jiangsu, 211100, China
Tel: +86 25 5216-3442
www.gofoton.cn

Go!Foton West Coast Sales
100 Century Center Court, Suite 203
San Jose, CA 95112, USA
Go!Foton Headquarters
28 World's Fair Drive
Somerset, NJ 08873, USA
Tel: +1 732 469 9650
Fax: +1 732 469 9654
www.gofoton.com